

Error Correction

Learning Goals

- Describe errors in quantum/classical systems
- Describe repetition codes + why they work
- Analyze how a repetition code corrects errors

Announcements


- CS Lunch Social: TINDIA! Chat with profs + friends
Friday 12:30, 75 SHS 102
- PSID #1 - 3 Haymaker gift cards

Exit Tickets (OH! Tues 12:30-1:30!)

U_f' is mathematically same as U_f , physically use U_f

Exit Tickets

- What if don't know a, b (Grover)?

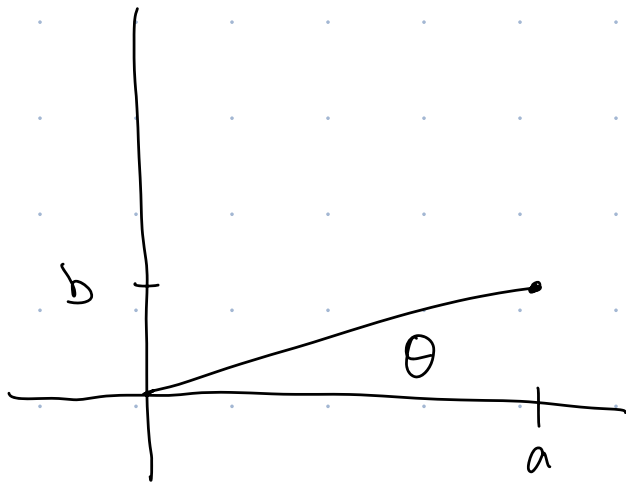

- What if do too many reflections?

- Q-Algs (QCS)
 - Period Finding
 - Deutsch-Jozsa
 - Grover

If Q. Computers are so great, why haven't we built one?

ERRORS - unwanted gates + measurement

- Classical Computers


 - Cosmic Rays $\rightarrow$ 1 bit flip / 4 GB / per day

 - Super mario glitch

 - Pace maker


 - Plane dropped

Solution: Repetition Code

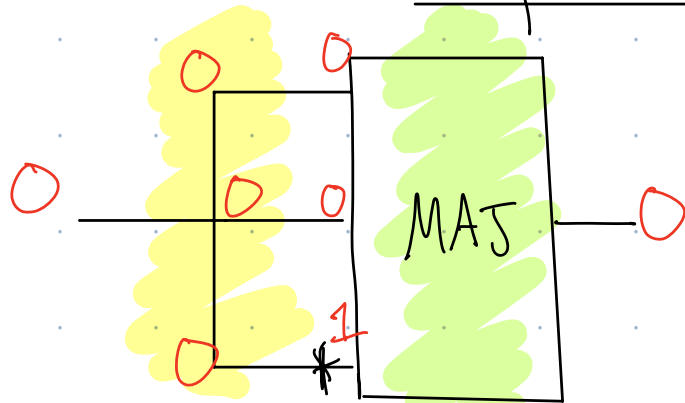

Fanout

"Encoding" "Error Correction"

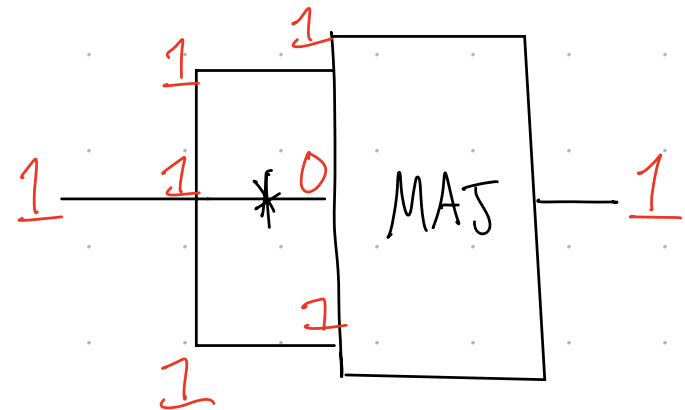

- Sources of Quantum Errors
 - control laser imperfect
 - imperfect vacuum
 - stray electric + magnetic fields
 - anomalous heating

Why won't repetition code work for quantum?


- A) MAJ not reversible
- B) Doesn't correct phase errors (Z)
- C) No fanout because can't copy quant
- D) There are uncountably infinitely many errors to deal with

Shor's Repetition Code

Encoding:

$$|\psi\rangle = a|0\rangle + b|1\rangle$$

↑
original state
to protect from
errors. Don't
know a, b

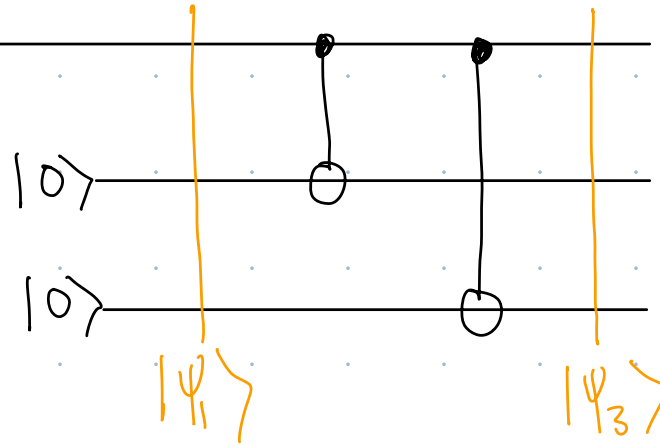

$$|\psi_1\rangle = (a|0\rangle + b|1\rangle)|0\rangle|0\rangle$$

$$|\psi_2\rangle =$$

physical qubits
↓ ↓ ↓

$$|\psi_3\rangle = \underbrace{a|000\rangle}_{|0\rangle} + \underbrace{b|111\rangle}_{|1\rangle} \leftarrow \text{logical qubit}$$

logical
ket 0




← logical ket 1


Error Correction Circuit

Syndrome Measurement Error Correction

$$|\psi_L\rangle = a|000\rangle + b|111\rangle$$

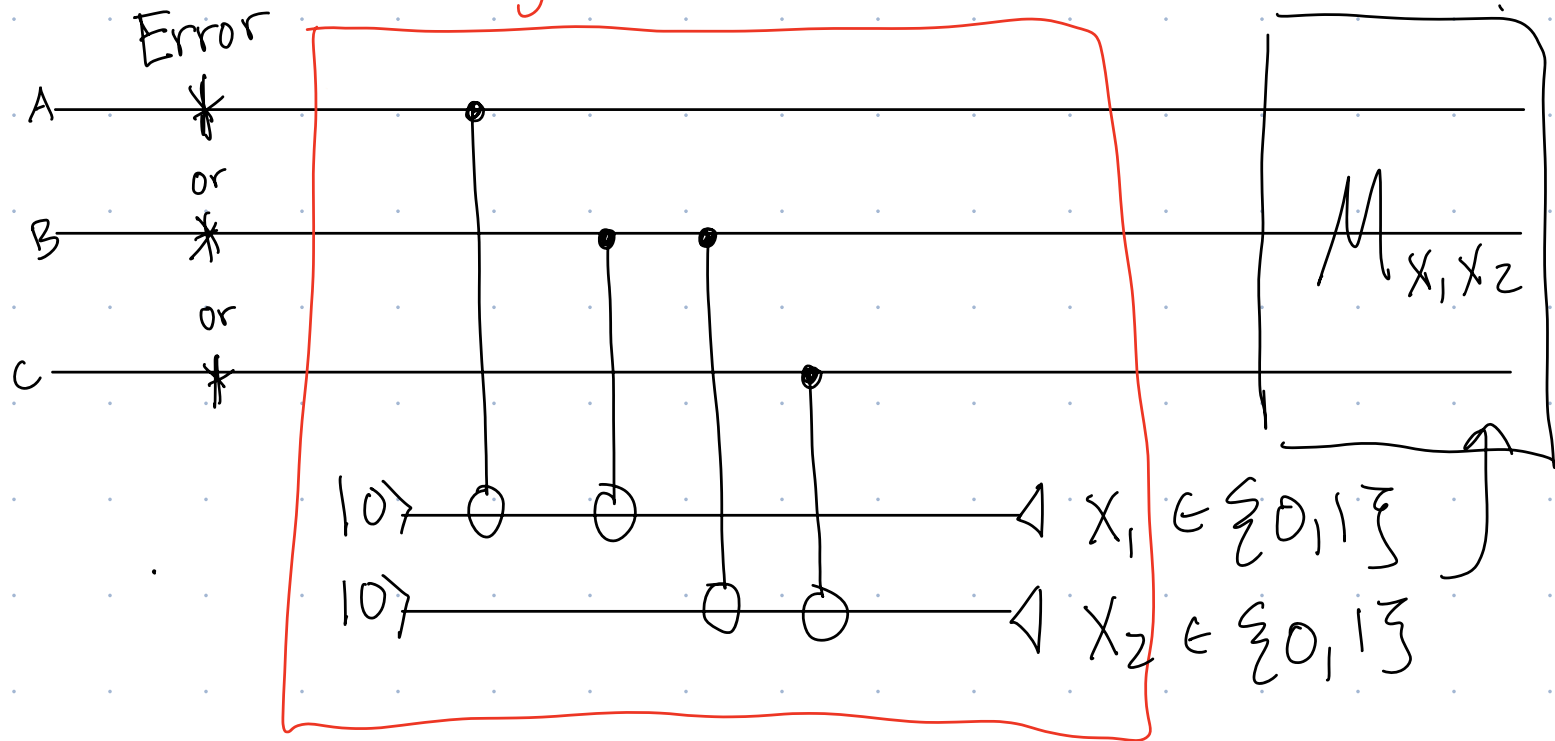

Syndrome Meas.

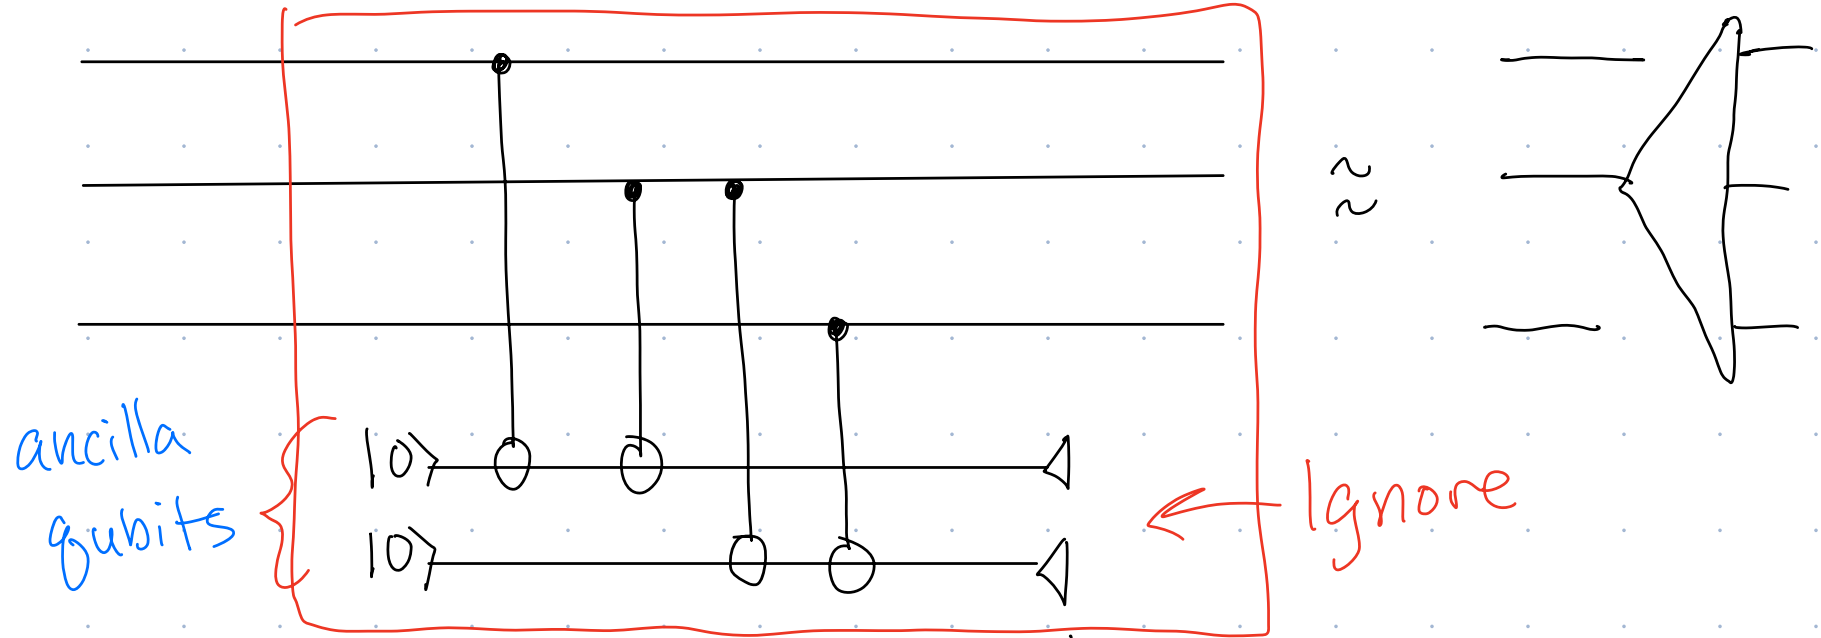

Not another partial measurement!

New approach: Projective Measurement

Projective Measurement

Described by a
Set of projectors

$$P_0 = |\phi_1\rangle\langle\phi_1| + |\phi_4\rangle\langle\phi_4|$$

$$P_1 = |\phi_3\rangle\langle\phi_3|$$

$$P_2 = |\phi_2\rangle\langle\phi_2| + |\phi_5\rangle\langle\phi_5| + |\phi_6\rangle\langle\phi_6|$$


⋮

technical: $\sum_i P_i = I$

Measure $|\psi\rangle$

Probability of outcome P_i : $\langle\psi|P_i|\psi\rangle$

After outcome i , state collapses to
$$\frac{P_i|\psi\rangle}{\sqrt{\text{Pr}(i)}}$$

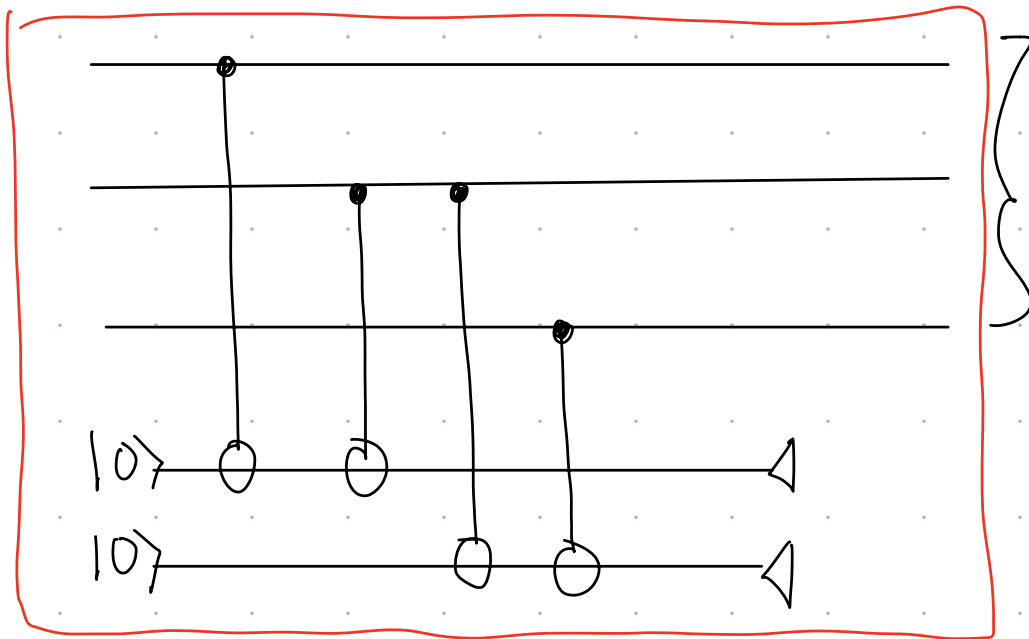

$$M = \left\{ \begin{array}{l} \boxed{|000\rangle\langle 000| + |111\rangle\langle 111|} \quad P_0 \\ \boxed{|001\rangle\langle 001| + |110\rangle\langle 110|} \quad P_1 \\ \boxed{|010\rangle\langle 010| + |101\rangle\langle 101|} \quad P_2 \\ \boxed{|100\rangle\langle 100| + |011\rangle\langle 011|} \quad P_3 \end{array} \right\}$$

If measure $|\psi\rangle = \frac{1}{\sqrt{6}}|000\rangle + \sqrt{\frac{2}{6}}|001\rangle + \sqrt{\frac{3}{6}}|110\rangle$ with M , which outcomes are possible?

$$|\psi\rangle \rightarrow \frac{P_i |\psi\rangle}{\sqrt{P(i)}} \quad P_r(i) = \langle \psi | P_i | \psi \rangle$$

A) P_0

$$Pr(P_0) = \frac{1}{6}$$

B) P_1

$$Pr(P_1) = \frac{5}{6}$$

C) P_2

$$\langle \psi | (|000\rangle\langle 000| + |111\rangle\langle 111|) \left(\frac{1}{\sqrt{6}}|000\rangle + \sqrt{\frac{2}{6}}|001\rangle + \sqrt{\frac{3}{6}}|110\rangle \right)$$

$$= \frac{1}{\sqrt{6}} \langle 000 | 000 \rangle + \sqrt{\frac{2}{6}} \langle 000 | 001 \rangle + \dots$$

D) P_3

$$\langle \psi | \frac{1}{\sqrt{6}}|000\rangle \rightarrow \frac{1}{\sqrt{6}} \cdot \frac{1}{\sqrt{6}} \langle 000 | 000 \rangle = \frac{1}{6}$$

If measure $|\psi\rangle = \frac{1}{\sqrt{6}}|000\rangle + \sqrt{\frac{2}{6}}|001\rangle + \sqrt{\frac{3}{6}}|110\rangle$ with M and get outcome $P_i = |001\rangle\langle 001| + |110\rangle\langle 110|$ what is the resultant state? $|\psi\rangle \rightarrow \frac{P_i|\psi\rangle}{\sqrt{P(i)}} \quad P(i) = \langle\psi|P_i|\psi\rangle$

$$P_i|\psi\rangle = (|001\rangle\langle 001| + |110\rangle\langle 110|) \left(\frac{1}{\sqrt{6}}|000\rangle + \sqrt{\frac{2}{6}}|001\rangle + \sqrt{\frac{3}{6}}|110\rangle \right)$$


$$= \sqrt{\frac{2}{6}}|001\rangle\langle 001| \overset{1}{|001\rangle} + \sqrt{\frac{3}{6}}|110\rangle\langle 110| \overset{1}{|110\rangle}$$

$$P_i|\psi\rangle = \left(\sqrt{\frac{2}{6}}|001\rangle + \sqrt{\frac{3}{6}}|110\rangle \right)$$

$$\frac{1}{\sqrt{P_i}} P_i|\psi\rangle = \left(\sqrt{\frac{2}{6}}|001\rangle + \sqrt{\frac{3}{6}}|110\rangle \right) \sqrt{\frac{6}{5}}$$

$$= \sqrt{\frac{2}{5}}|001\rangle + \sqrt{\frac{3}{5}}|110\rangle$$

Group Exercise

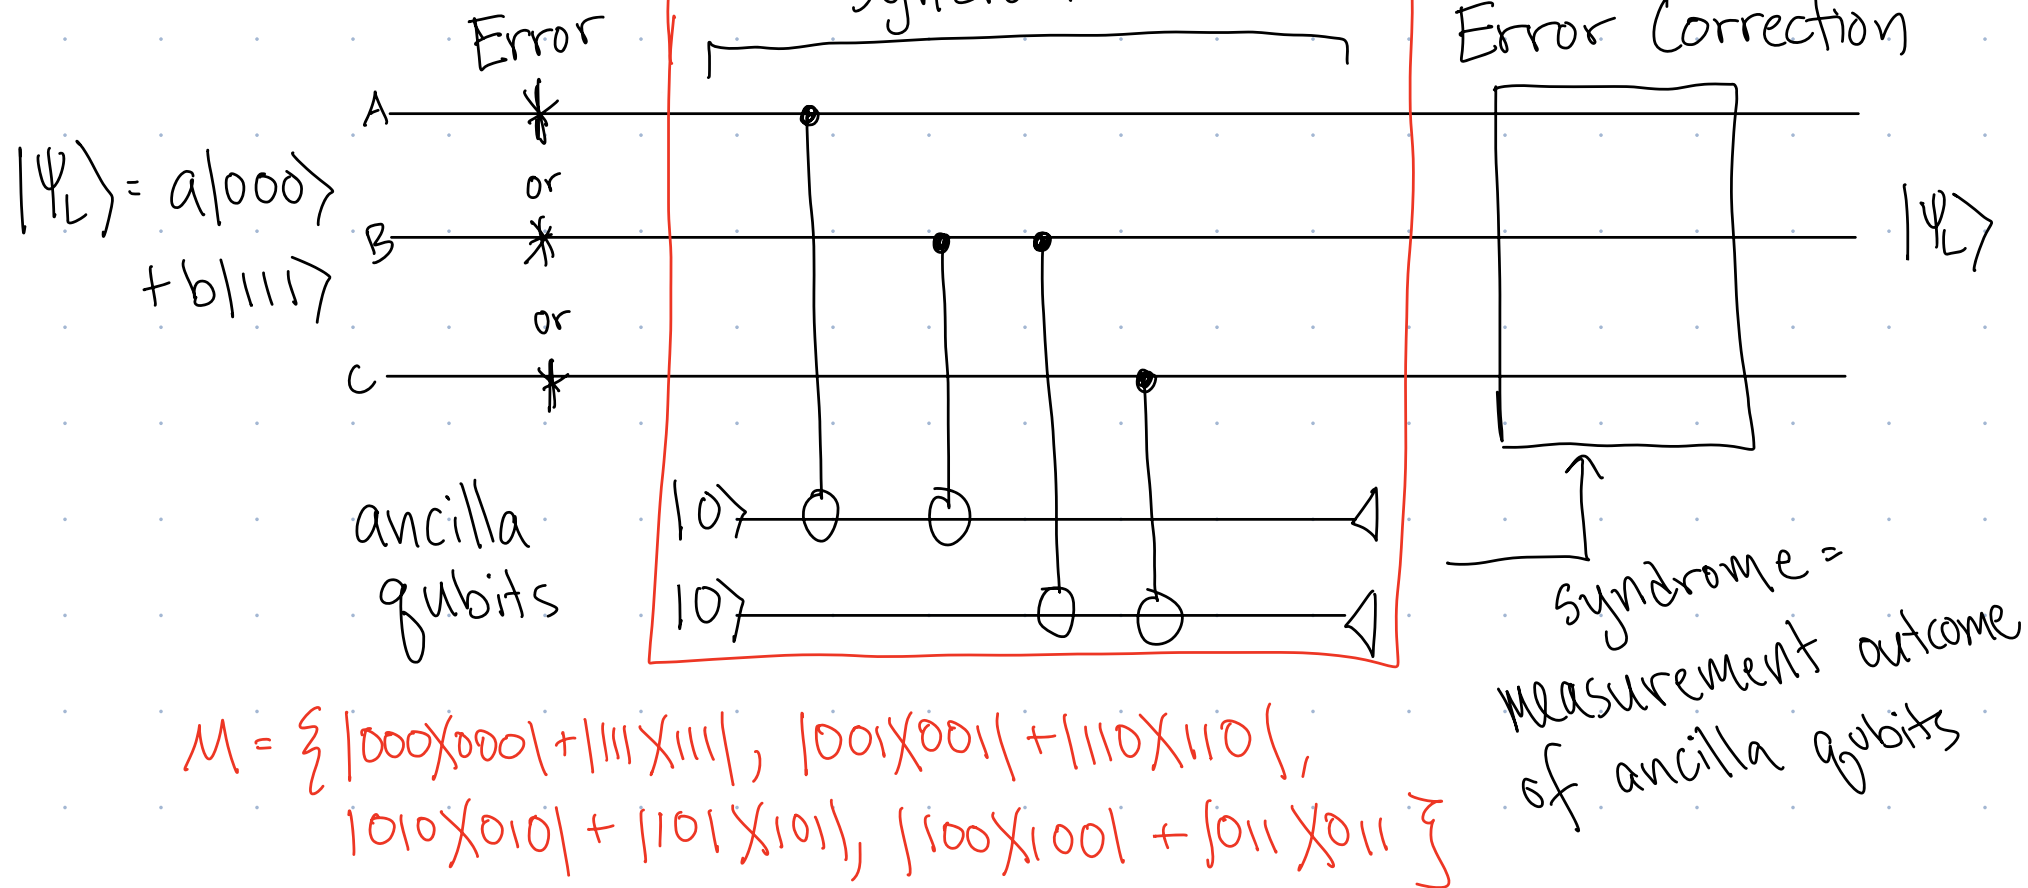


*: $R_x(\theta) = \cos\theta I + i\sin\theta X$

ex: $R_x(\theta)|1\rangle = \cos\theta I|1\rangle + i\sin\theta X|1\rangle = \cos\theta|1\rangle + i\sin\theta|0\rangle$

1. What are possible outcomes + what does state collapse to?
2. What error correction procedure should be used in each case?

Solution

$$|\psi_L\rangle = a|000\rangle + b|111\rangle$$

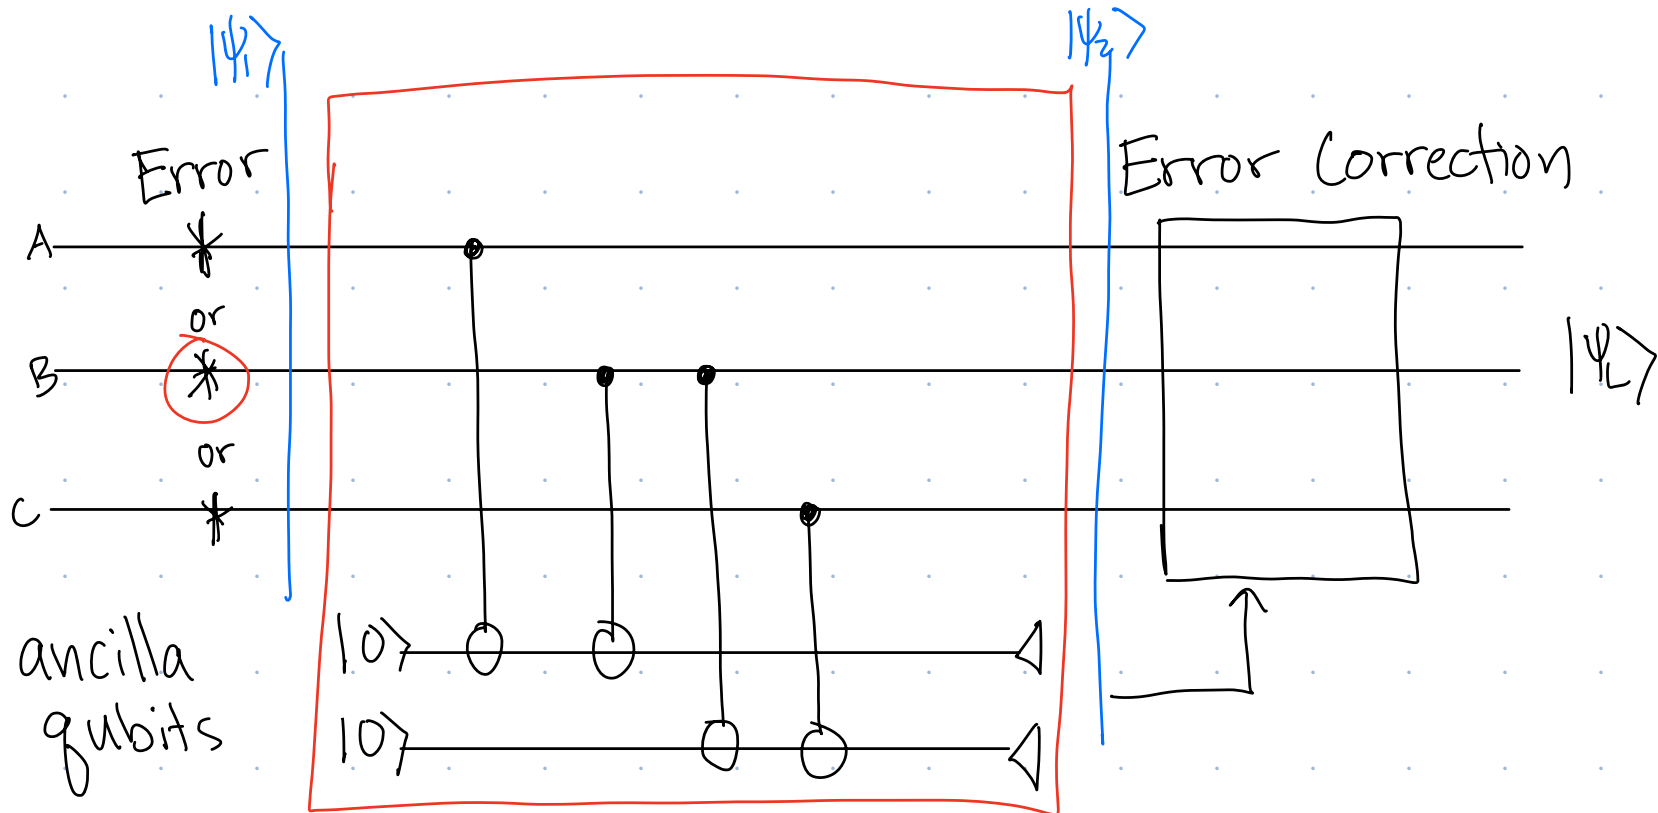

$$M = \{ |000\rangle\langle 000| + |111\rangle\langle 111|, |001\rangle\langle 001| + |110\rangle\langle 110|, \\ |101\rangle\langle 101| + |101\rangle\langle 101|, |100\rangle\langle 100| + |011\rangle\langle 011| \}$$



Error on A qubit:	Outcome	or
Error on B qubit	Outcome	or
Error on C qubit	Outcome	or

Big Idea with Error Correction

Rules for Correcting Proj. Meas

Outcome

$$P_i = \{ |\psi_a\rangle\langle\psi_a| + |\psi_b\rangle\langle\psi_b| + \dots \} \approx \{ |\psi_a\rangle, |\psi_b\rangle, \dots \}$$

If get outcome P_i , state collapses to
 $\alpha |\psi_a\rangle + \beta |\psi_b\rangle$ (α, β unknown)

We want to be in

$$\gamma |0_L\rangle + \eta |1_L\rangle \quad (\gamma, \eta \text{ unknown})$$

Correct by finding lowest weight correction

Correction Rule:

* Find lowest weight correction

ex: Outcome $\{|100\rangle, |011\rangle\}$ ^{collapse} $\rightarrow \alpha|100\rangle + \beta|011\rangle$

• If apply $X_1 \Rightarrow$

• If apply $X_2 X_3 \Rightarrow$

Need to Correct More Errors? Bigger Code!

$$|0_L\rangle = (|000\rangle_{123} + |111\rangle_{123}) (|000\rangle_{456} + |111\rangle_{456}) (|000\rangle_{789} + |111\rangle_{789})$$

$$|1_L\rangle = (|000\rangle - |111\rangle) (|000\rangle - |111\rangle) (|000\rangle - |111\rangle)$$

} 9-qubit
Shor Code



Z_6 error:

$$|0_L\rangle = (|000\rangle_{123} + |111\rangle_{123}) (|000\rangle_{456} + |111\rangle_{456}) (|000\rangle_{789} + |111\rangle_{789})$$

$$|1_L\rangle = (|000\rangle - |111\rangle) (|000\rangle - |111\rangle) (|000\rangle - |111\rangle)$$

Corrects any
single qubit
error

Z_1 and Z_4

$$|0_L\rangle = (|000\rangle_{123} + |111\rangle_{123}) (|000\rangle_{456} + |111\rangle_{456}) (|000\rangle_{789} + |111\rangle_{789})$$

$$|1_L\rangle = (|000\rangle - |111\rangle) (|000\rangle - |111\rangle) (|000\rangle - |111\rangle)$$

Need to Correct More Errors? Bigger Code!

$$|0_L\rangle = (|000\rangle_{123} + |111\rangle_{123}) (|000\rangle_{456} + |111\rangle_{456}) (|000\rangle_{789} + |111\rangle_{789})$$

$$|1_L\rangle = (|000\rangle - |111\rangle) (|000\rangle - |111\rangle) (|000\rangle - |111\rangle)$$

} 9-qubit
Shor Code



Corrects any
single qubit
error

Easiest way to return to code
space?

Which errors can be corrected by Shor's code?

$$|0_L\rangle = \left(|000\rangle_{123} + |111\rangle_{123} \right) \left(|000\rangle_{456} + |111\rangle_{456} \right) \left(|000\rangle_{789} + |111\rangle_{789} \right)$$

$$|1_L\rangle = \left(|000\rangle_{123} - |111\rangle_{123} \right) \left(|000\rangle_{456} - |111\rangle_{456} \right) \left(|000\rangle_{789} - |111\rangle_{789} \right)$$

A) $Z_1 Z_2$

E) $X_1 X_2$

B) $Z_4 Z_8$

F) $X_1 X_4$

C) $Z_1 Z_2 Z_3$

G) $Y_1 Z_4$

D) $X_1 Z_2$

Fault Tolerant Quantum Computing

Shor Code: All single qubit errors, 9 qubits, 1 logical qubit


Concatenation: All 2-qubit errors, 81 qubits, 1 logical qubit

$$|0_L\rangle = \left(|000\rangle_{123} + |111\rangle_{123} \right) \left(|000\rangle_{456} + |111\rangle_{456} \right) \left(|000\rangle_{789} + |111\rangle_{789} \right)$$

$$|1_L\rangle = \left(|000\rangle_{123} - |111\rangle_{123} \right) \left(|000\rangle_{456} - |111\rangle_{456} \right) \left(|000\rangle_{789} - |111\rangle_{789} \right)$$

$\downarrow$
 $|0_L\rangle$

But... more qubits means more chance of error. Can only keep ahead of accumulating errors if error rate is small enough

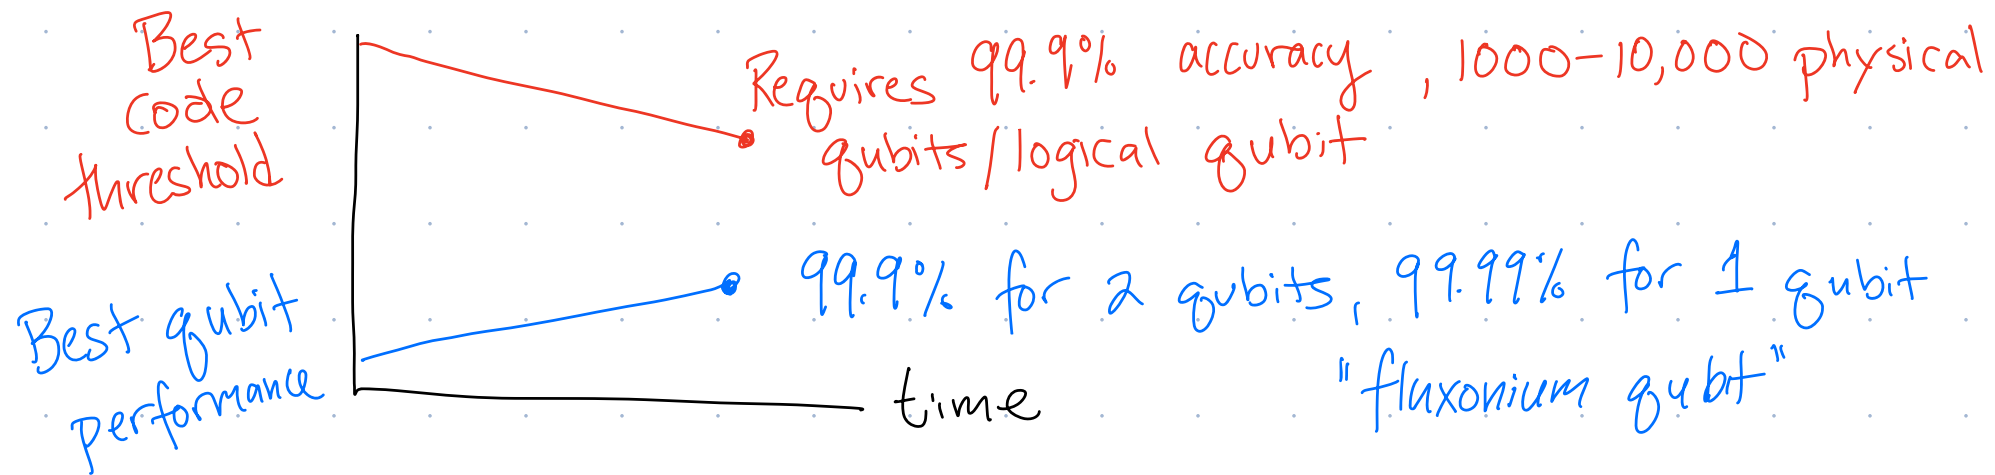

E

